


Contrabass Chimes

C MAJOR PENTATONIC

Features:

- Steel Powder Coated Support Poles
- Anodized Aluminum Chimes
- Stainless Steel Hardware

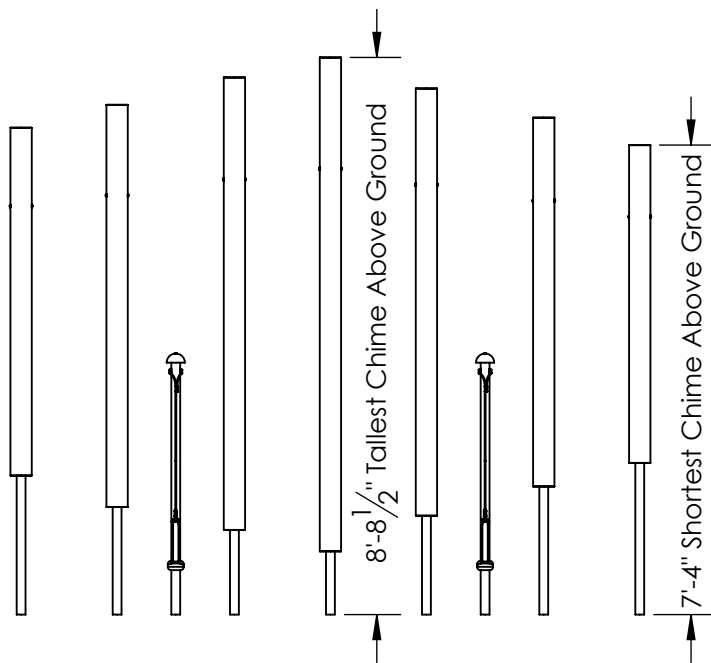

In-Ground Installation Instructions

Sheet 2 of 3

Surface Mount Installation Instructions

Sheet 3 of 3



FREENOTES HARMONY PARK
194 BODO DRIVE, UNIT F
DURANGO CO 81303
TEL: (970) 375-7825
FAX: (970) 247-0856
EMAIL: INFO@FREENOTESHARMONYPARK.COM
WWW.FREENOTESHARMONYPARK.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FREENOTES HARMONY PARK. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
FREENOTES HARMONY PARK IS
PROHIBITED.

Contrabass Chimes 2017 - Installation Guide

REVISION: A

SCALE: 1:36

SHEET 1 OF 3

IN-GROUND INSTALLATION PROCEDURES

Step 1: Determine your layout. Chimes are numbered from Longest #1 to Shortest #7. Spacing between Chimes and Mallet Poles must be maintained per the diagram shown to allow the Mallets to reach each Chime. Although the Chimes can be laid out in a variety of styles such as an arc, wave, or straight-line; we suggest one of the following layout ordering:

- #6, #4, Mallet Pole, #2, #1, #3, Mallet Pole, #5, #7
- #1, #2, Mallet Pole, #3, #4, #5, Mallet Pole, #6, #7

Step 2: After choosing your layout, excavate (9) 10" Diameter holes, at 36" deep.

Step 3 (Optional): Pound 36" long Steel Rebar (not provided) 18" into the center of each hole. This process helps with keeping the Chimes vertical while the concrete cures. Place each Chime into their holes over the Rebar.


Step 4: Place each Chime into their holes, then pour concrete around the in ground poles. Check that all Chimes are level. Leave concrete to set according to the concrete manufacturer's guidelines. If necessary, brace the Chimes to hold them rigid during the curing process. Approximately (18) 80 lb bags will be needed. *(Chimes must be as vertical as possible for best sound)*

Parts List:

- Chime #1, 93" lg. (1)
- Chime #2, 85" lg. (1)
- Chime #3, 80" lg. (1)
- Chime #4, 76" lg. (1)
- Chime #5, 69" lg. (1)
- Chime #6, 65" lg. (1)
- Chime #7, 60" lg. (1)
- Mallet Poles (2)

Weights:

Boxed Instrument Weight, 35-40 lbs. per Chime
 Boxed Mallet Pole Weight, 40 lbs.

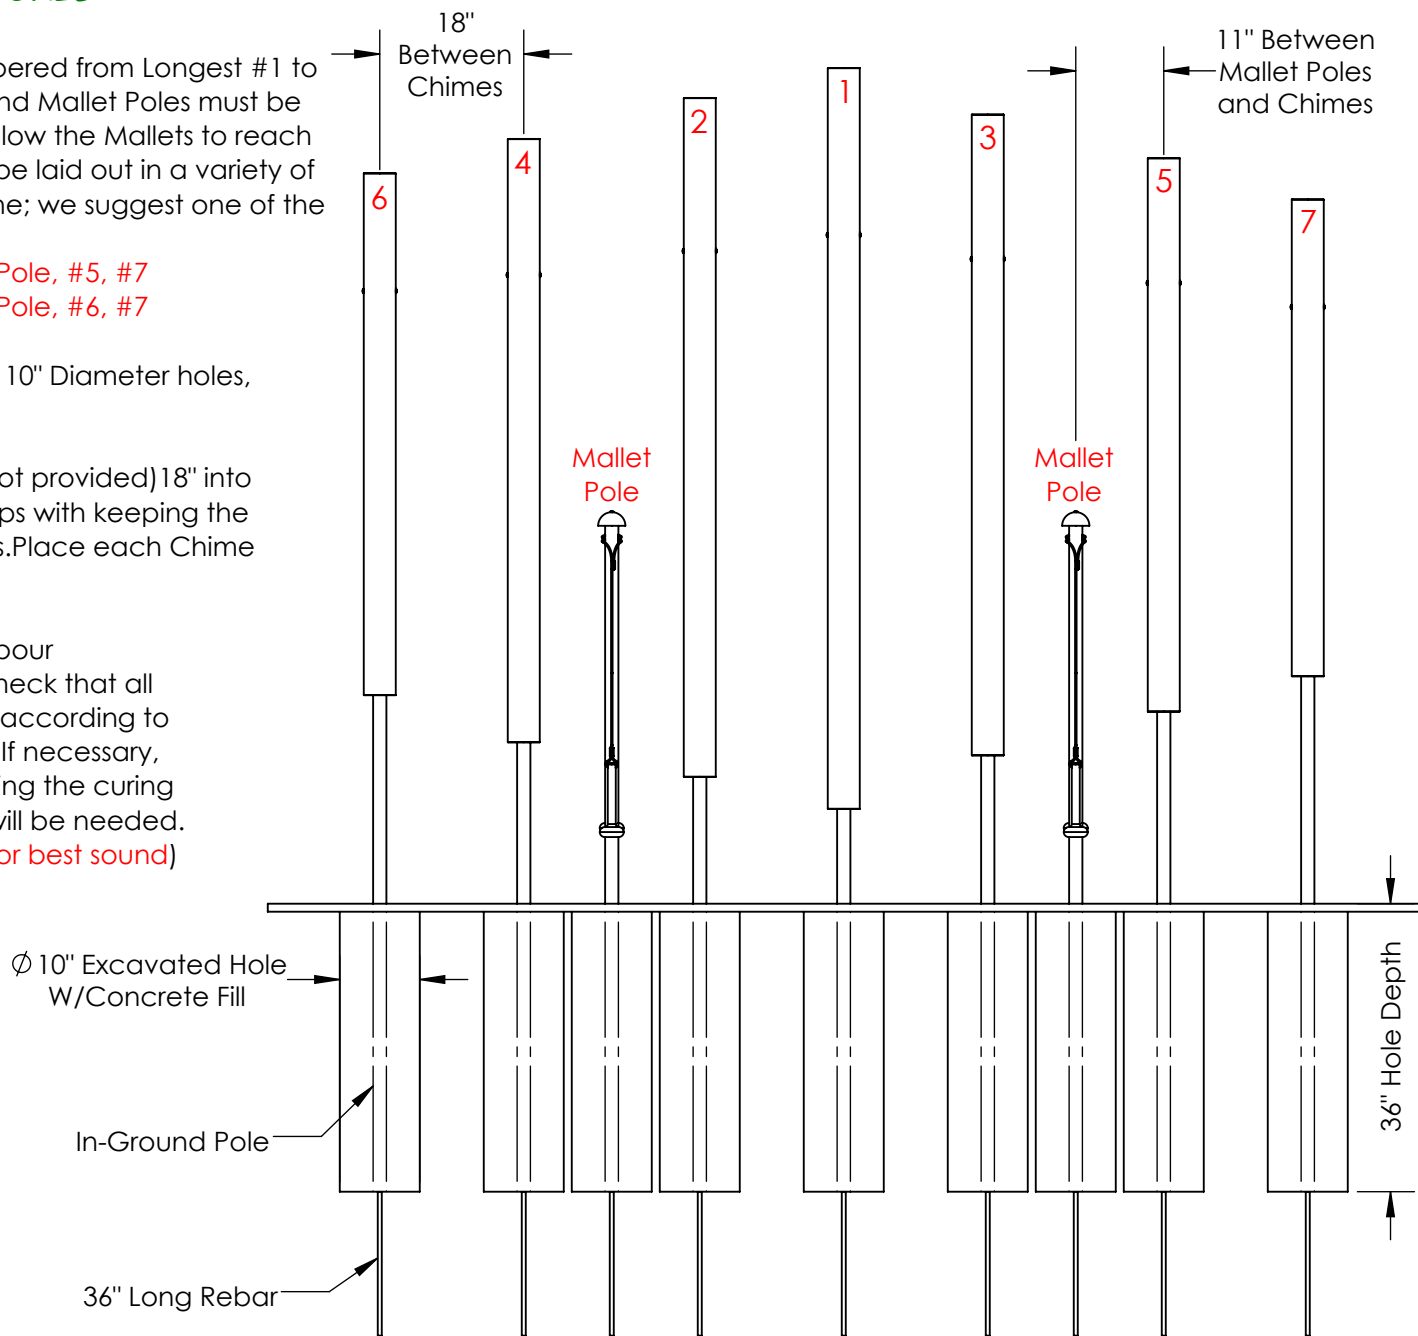

FREENOTES HARMONY PARK
 194 BODO DRIVE, UNIT F
 DURANGO CO 81303
 TEL: (970) 375-7825
 FAX: (970) 247-0856
 EMAIL: INFO@FREENOTESHARMONYPARK.COM
 WWW.FREENOTESHARMONYPARK.COM

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 FREENOTES HARMONY PARK. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 FREENOTES HARMONY PARK IS
 PROHIBITED.

Contrabass Chimes 2017 - Installation Guide

REVISION: A

SCALE: 1:24

SHEET 2 OF 3

SURFACE MOUNT INSTALLATION PROCEDURES

Step 1: Determine your layout. Chimes are numbered from Longest #1 to Shortest #7. Spacing between Chimes and Mallet Poles must be maintained per the diagram shown to allow the Mallets to reach each Chime. Although the Chimes can be laid out in a variety of styles such as an arc, wave, or straight-line; we suggest one of the following layout ordering:

- #6, #4, Mallet Pole, #2, #1, #3, Mallet Pole, #5, #7
- #1, #2, Mallet Pole, #3, #4, #5, Mallet Pole, #6, #7

Step 2: With two people place the Chimes and Mallet Poles individually onto the concrete pad and mark the center of the holes on the surface mount plates. After you have made your marks, set aside the Chimes and Mallet Poles in order to drill for anchor hole. With a hammer or rotary drill, drill through concrete at marked locations. Drill to a minimum depth of 4". A 3/8" masonry drill bit will be needed.

Step 3: Place the Chimes and Mallet Poles back over the drilled out holes. Insert provided anchor bolts into aligned holes. Position the anchor nut so that it is flush with the top of the bolt. Pound anchor bolts into the hole until the anchor washer is flush with the upright bases. Tighten anchor bolts until they are snug. Cover remaining bolt sections with provided plastic caps.

Parts List:

- Chime #1, 93" lg. (1)
- Chime #2, 85" lg. (1)
- Chime #3, 80" lg. (1)
- Chime #4, 76" lg. (1)
- Chime #5, 69" lg. (1)
- Chime #6, 65" lg. (1)
- Chime #7, 60" lg. (1)
- Mallet Poles (2)
- $\varnothing 3/8" \times 3 3/4"$ Anchor Bolt (27)
- Plastic Anchor Cap (27)

Weights:

Boxed Instrument Weight, 35-40 lbs. per Chime
 Boxed Mallet Pole Weight, 40 lbs.
 Boxed Hardware Weight, 5 lbs.

